


LEGEND

- BLENDING VALVE PRE SET BELOW 48°C
- ISOLATION TEE VALVE
- ISOLATION VALVE
- HOT WATER SERVICE
- COLD WATER SERVICE
- BRASS STOP COCK
- SVP
- TRITON T80Z 7.5KW SHOWER
- ACCESS PANEL SEE TYPICAL DETAIL
- NON-RETURN VALVE
- PRESSURE REDUCING VALVE
- ARISTON 10L ANDRIS LUX 2KW C/W EXPANSION VESSEL AND TUNDISH
- ARISTON 2L EXPANSION VESSEL (KIT A) AND TUNDISH (KIT C)

0M 1M 2M
SCALE BAR @ 1:20

Fig. 2
(Models 10L)

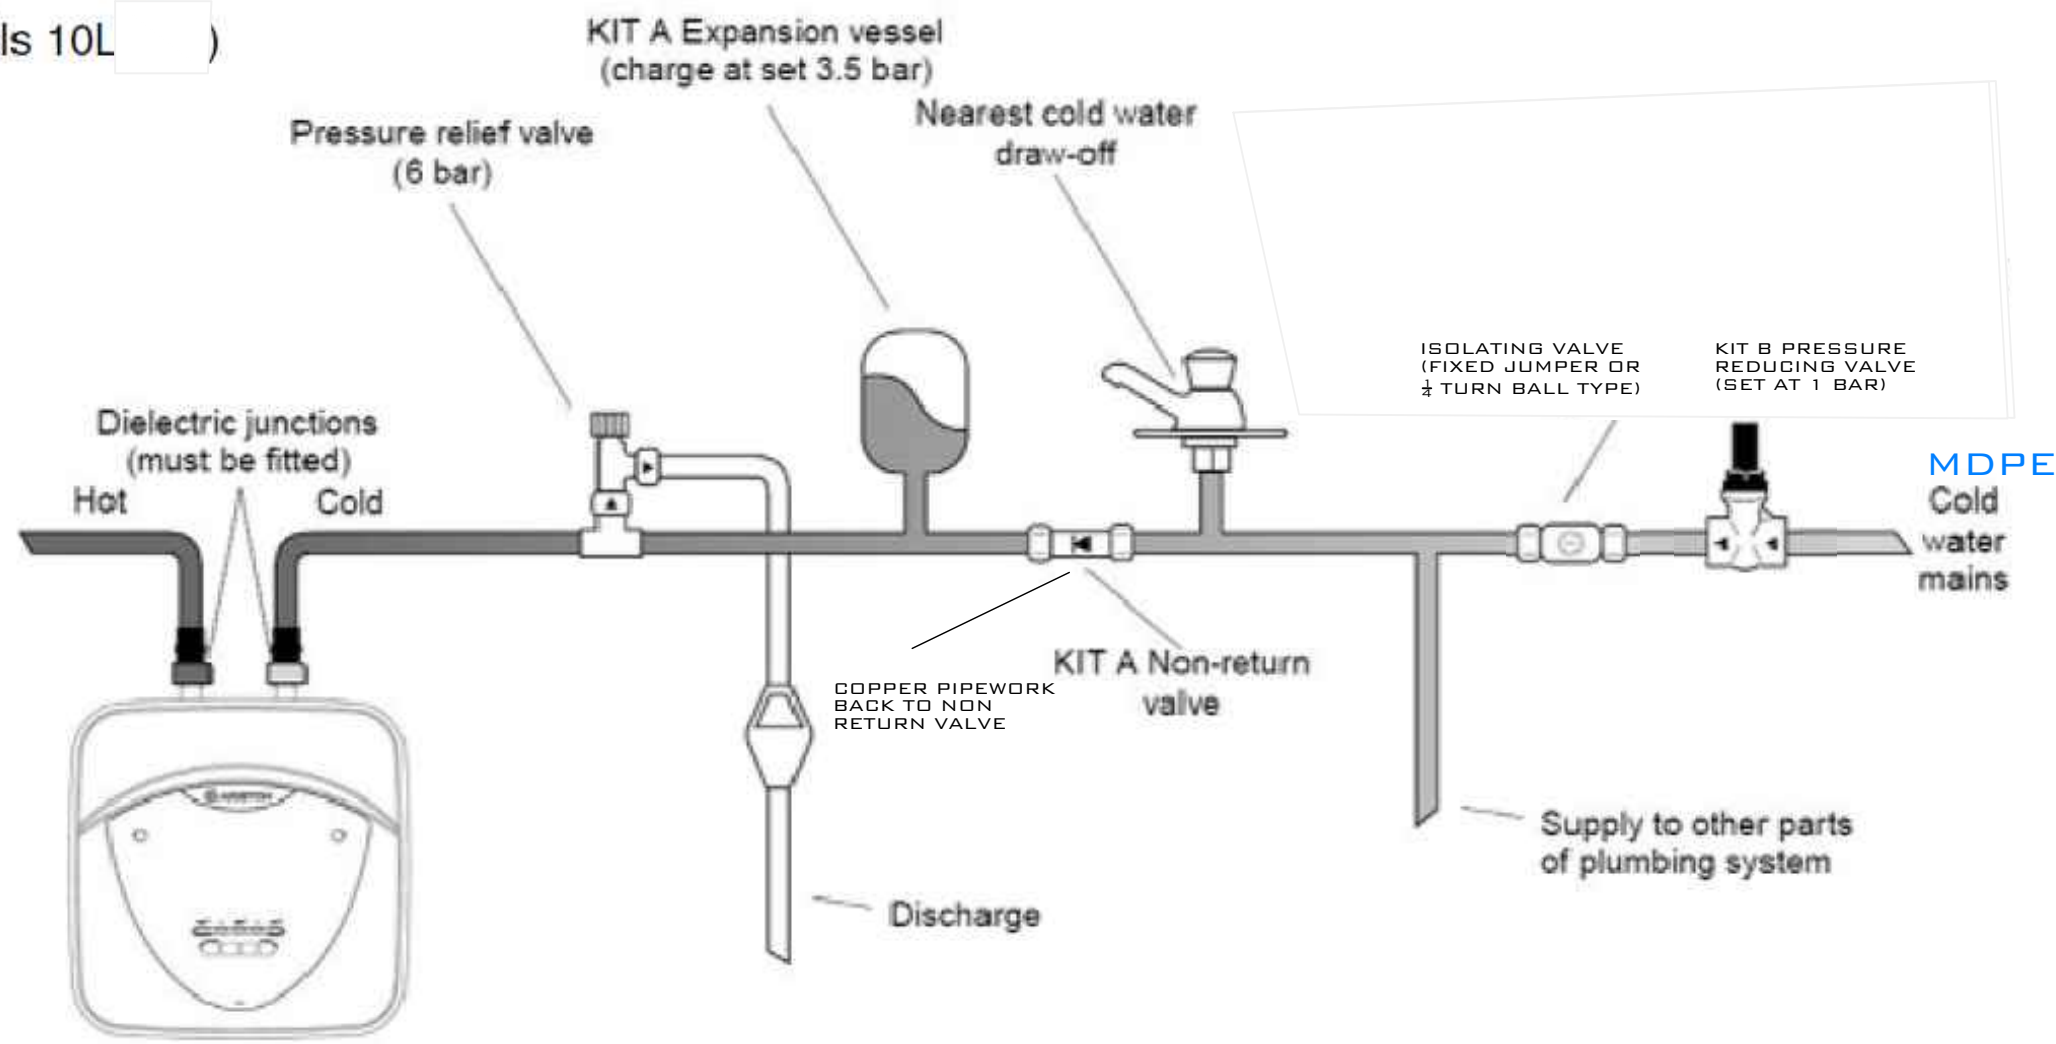

NOTES:

- DO NOT SCALE FROM THIS DRAWING. WORK FROM FIGURED DIMENSIONS ONLY.
- ALL DIMENSIONS ARE IN MM, UNLESS STATED OTHERWISE.
- ALL DIMENSIONS TO BE CHECKED ON SITE PRIOR TO CONSTRUCTION OR ORDERING.
- ANY ERRORS OR OMISSIONS TO BE NOTIFIED TO CITYZEN LIMITED IMMEDIATELY.
- CONTRACTOR TO READ & CHECK ALL MANUFACTURES LITERATURE AND IMPLEMENT ITS REQUIREMENTS PRIOR TO INSTALLATION OF ANY MATERIALS AND COMPONENTS.
- CITYZEN LIMITED IS NOT RESPONSIBLE FOR ANY BUILDING WORK THAT IS CARRIED OUT ON SITE.
- THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL NECESSARY ARCHITECTURAL, STRUCTURAL AND SPECIALIST DRAWINGS, SPECIFICATIONS, SCOPES OF WORK & ROOM DATA SHEETS.
- ALL MATERIALS AND WORKMANSHIP SHALL CONFORM WITH THE RELEVANT BRITISH AND EUROPEAN STANDARD, SPECIFICATIONS AND CODES OF PRACTICE.
- IF IN ANY DOUBT, ASK.

- NO PLASTIC PIPE JOINTS ARE TO BE INSTALLED WHERE INACCESSIBLE IN THE FUTURE.
- INCOMER TO BE IN MDPE
- ALL UNITS TO BE PROVIDED WITH PRV
- ALL PIPES TO BE INSULATED.
- PLASTIC PIPE TO BE HEP20 BY WAVIN & COLD FORMED BENDS ARE TO BE CREATED WITH PROPRIETARY FORMERS.
- ALL PIPEWORK & EQUIPMENT SHALL BE INSTALLED, TESTED & COMMISSIONED IN LINE WITH THE WATER REGULATIONS & BYLAWS.
- ALL EXTERNAL PENETRATIONS, CABLES, PIPES AND DUCTS TO BE PROVIDED WITH FIRE COLLARS & SLEEVES.
- SEE DRAWING 1705-301 FOR THE TYPICAL SERVICES INTERNAL CUPBOARD.

| | | | | | |
|---------------------------|----------|--------------------------------------|-------|---------|----------|
| B | 04.09.17 | KITCHEN FLUPPED | AG | JS | JS |
| A | 07.08.17 | BLENDING VALVES ADDED AT BCO REQUEST | AG | JS | JS |
| REV | DATE | REVISION | DRAWN | CHECKED | APPROVED |
| COPYRIGHT CITYZEN LIMITED | | | | | |

| | | | | | | |
|---|--|---|--|--|--|--|
| CITYZEN ARCHITECTURE ENVIRONMENT MARITIME HOUSE BASIN ROAD NORTH HOVE EAST SUSSEX BN41 1WR | | CONTACT@CITYZENDESIGN.CO.UK WWW.CITYZENDESIGN.CO.UK 01273 704 901 | | Chartered Institute of Architectural Technicians Registered Practice | | |
| CLIENT: CARGOTEK | | | | | | |
| DESIGNER: JOHN SMITH | | | | | | |
| PROJECT: CARGOTEK 20FT PRODUCT | | | | | | |
| TITLE: WATER SERVICES TYPE 2 CONFIGURATION - HANDED | | | | | | |
| SCALE: 1:20 @ A1 1:40 @ A3 | | DATE: 27/06/2017 | | | | |
| PURPOSE OF DRAWING: CONSTRUCTION | | | | | | |
| DRAWING: PROJECT REF : DRG NO. (REVISION) 1705-H223 (B) | | | | | | |

CDM 2015 RESIDUAL RISK

MECHANICAL

MECHANICAL CONTRACTORS SHALL FAMILIARISE THEMSELVES WITH THE INSTALLATION AND EMPLOY SYSTEMS AND METHODS OF WORKING TO REDUCE ANY HAZARDS.

IF IN DOUBT ASK AND NOTIFY GENERAL

IT IS UNDERSTOOD THAT A COMPETENT CONTRACTOR FAMILIAR WITH THE WORKS REQUIRED WILL BE APPOINTED AND THAT THEY WILL BE AWARE OF THE STANDARD HAZARDS.