

GENERAL NOTES:

ALL DRAWINGS TO BE READ IN CONJUNCTION WITH RELEVANT STRUCTURAL ENGINEERS DRAWINGS, WINDOW & DOOR SCHEDULES, M&E DRAWINGS, CONTAINER DATA SHEETS & PRODUCT DATA SHEETS.




REFER TO M&E DRAWINGS FOR SETTING OUT HEIGHTS OF FITTINGS

ALL CONTAINERS & ALL STEEL COVER PLATES, & STEEL MOUNTING PLATES TO BE PAINTED EXTERNALLY ANTHRACITE GREY, RAL 7016 USING CONTAINERGARD 1 TOUCH UP PAINT, OIL BASED, MATT FINISH. ENSURE PAINT HAS A CLASS 0 SURFACE SPREAD OF FLAME.

WHERE STAIRS / WALKWAY CONNECTS TO CONTAINER, ALL CONNECTIONS SHOULD BE ACOUSTICALLY SEPARATED AS DRAWING 1705-550 & PER ENGINEERS DETAILS.

PENETRATIONS THROUGH WALKWAY TO BE FIRE STOPPED AS PER DETAIL DRAWING 1705-561. USING A SUPALUX FIREBOARD, FIRE COLLARS & SUITABLE B1 EXPANDING FIRE FOAM.

FR = FROSTED GLASS  
TG = TOUGHENED GLASS

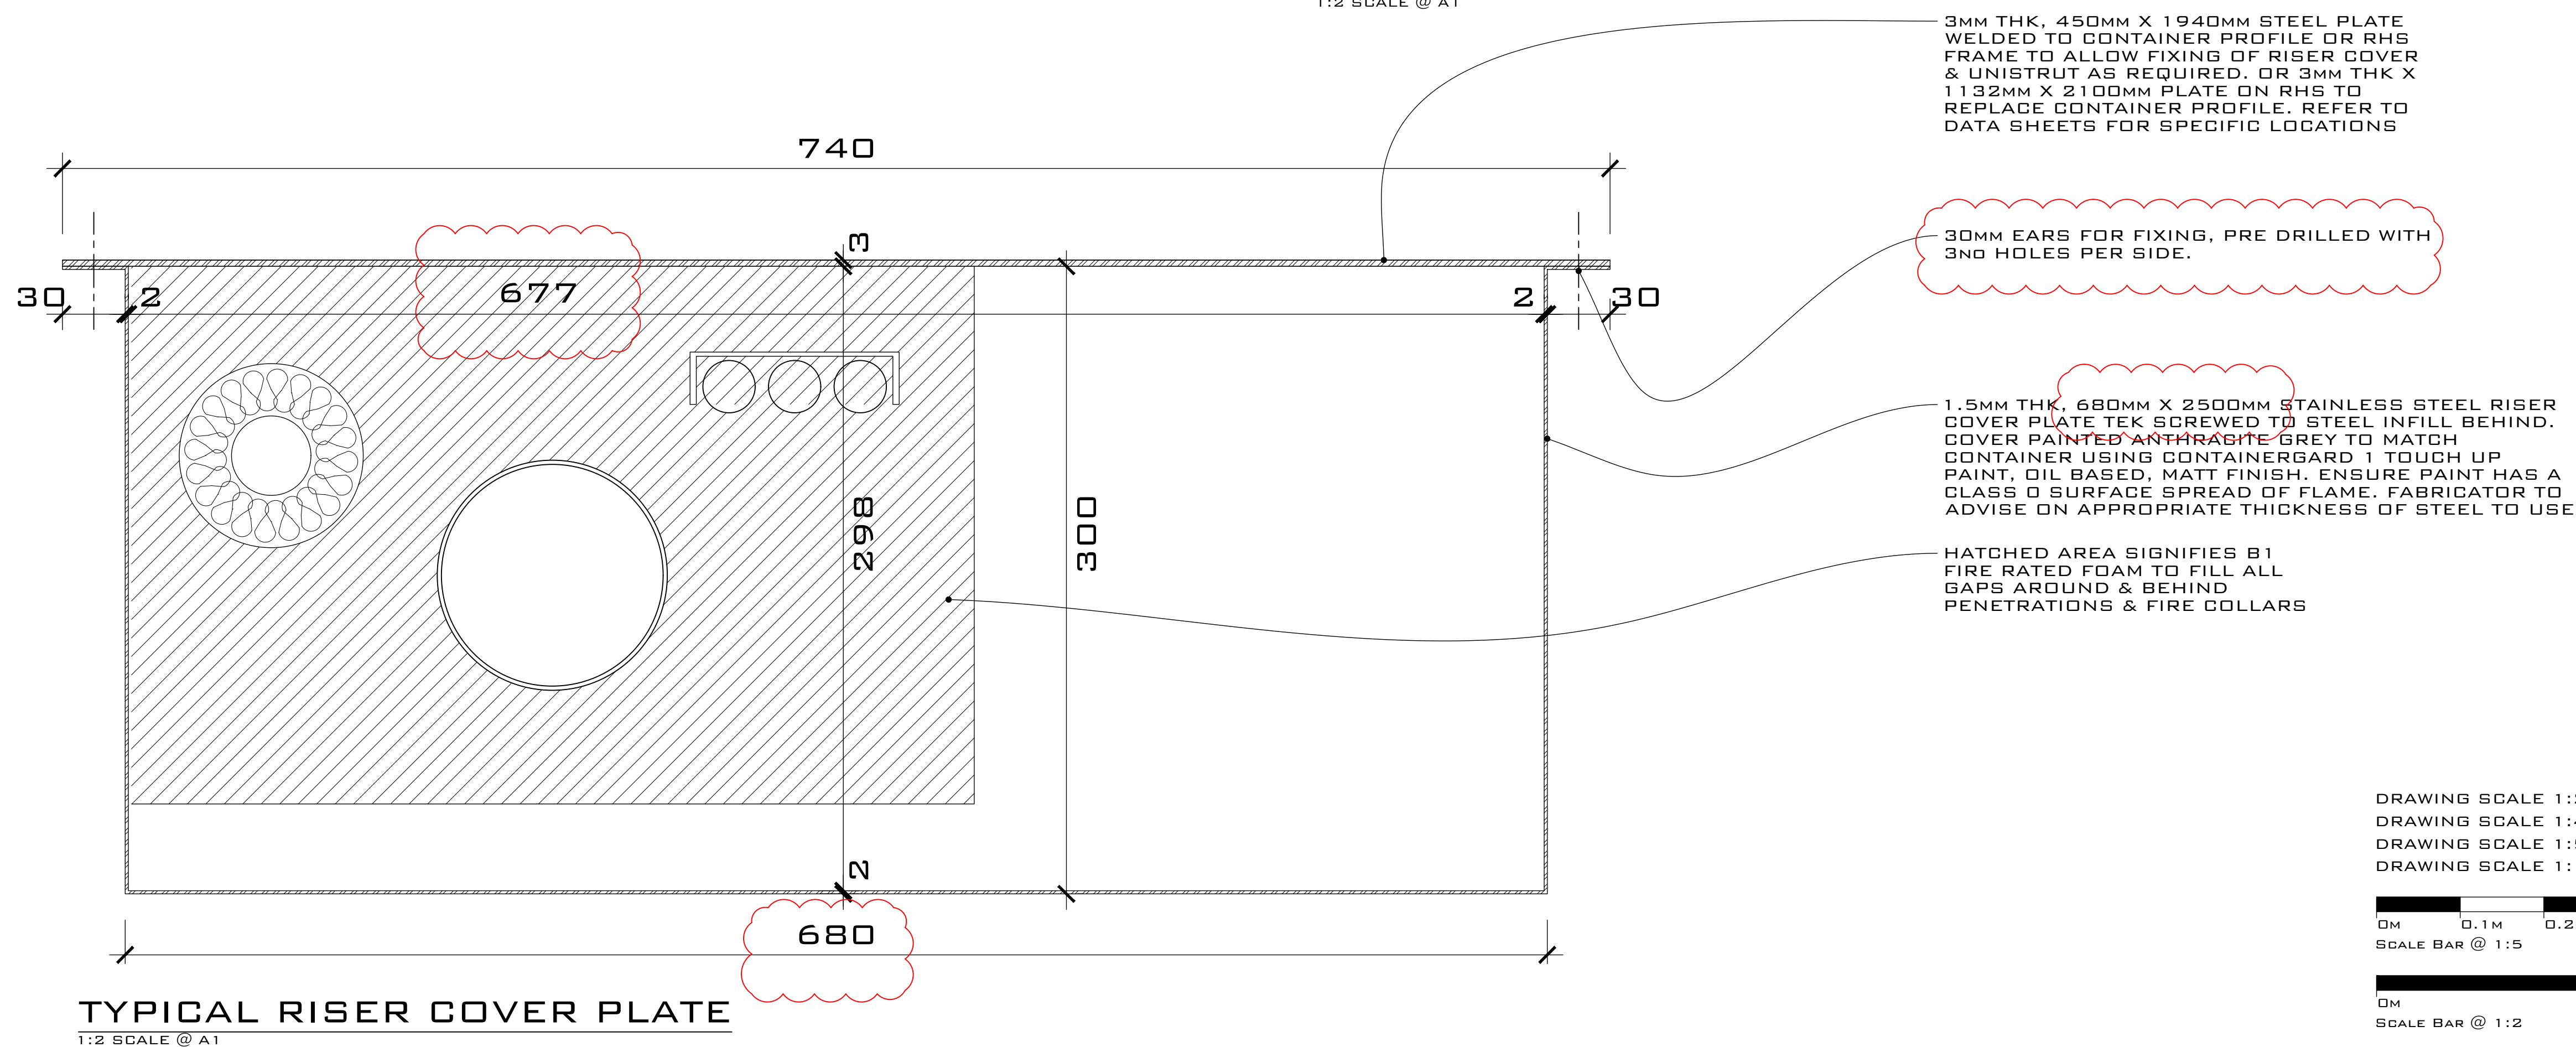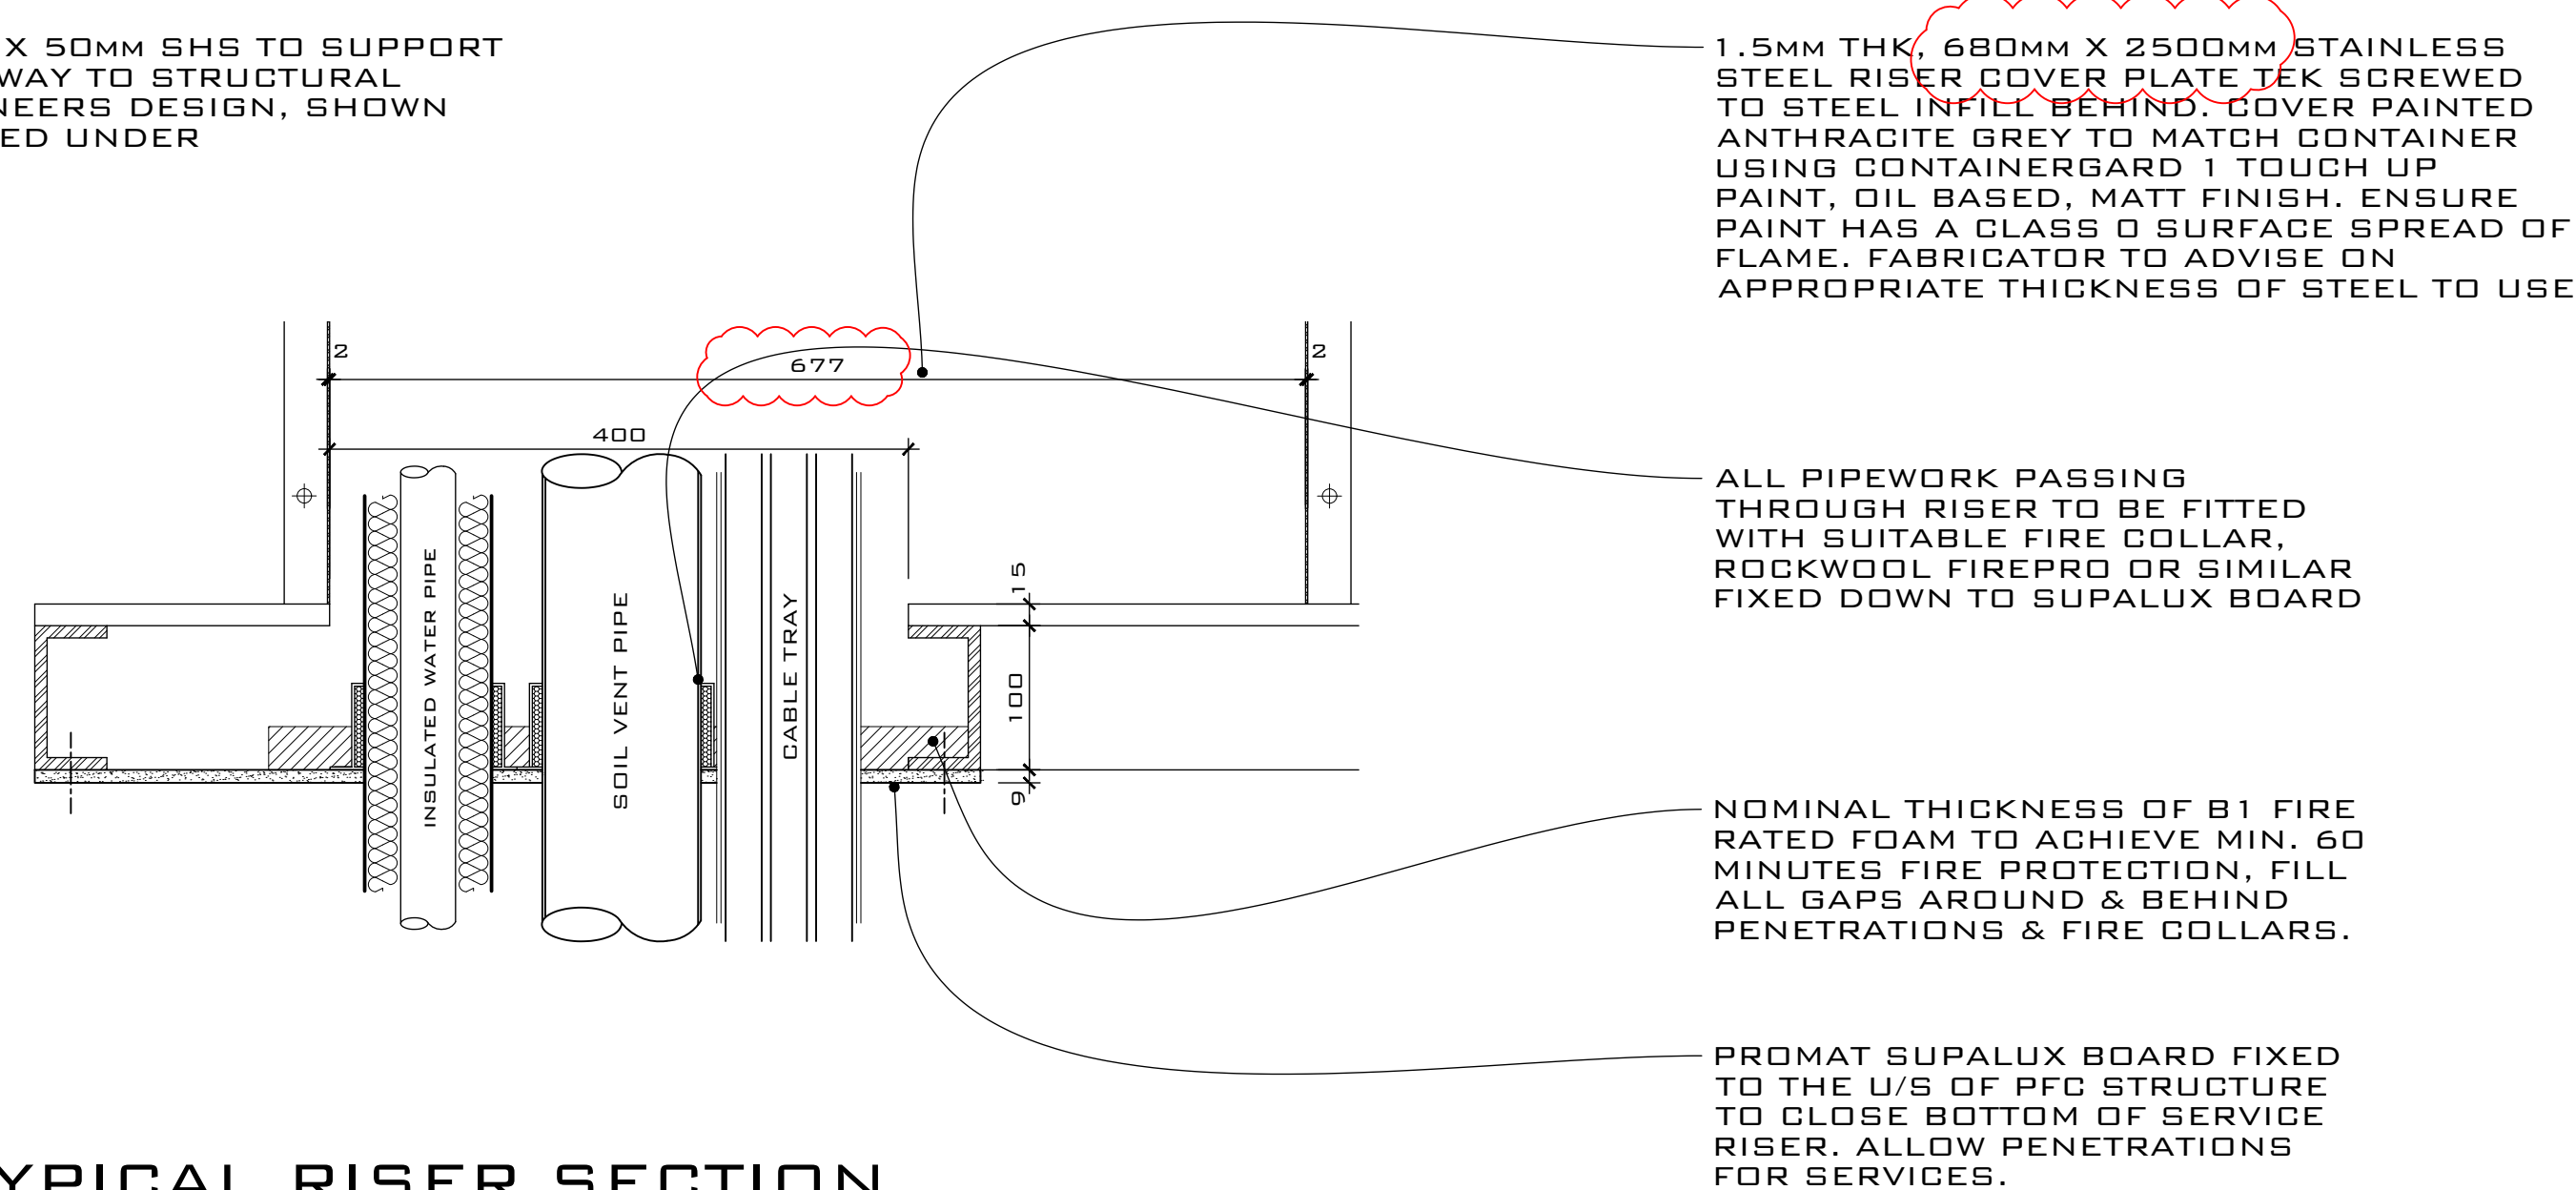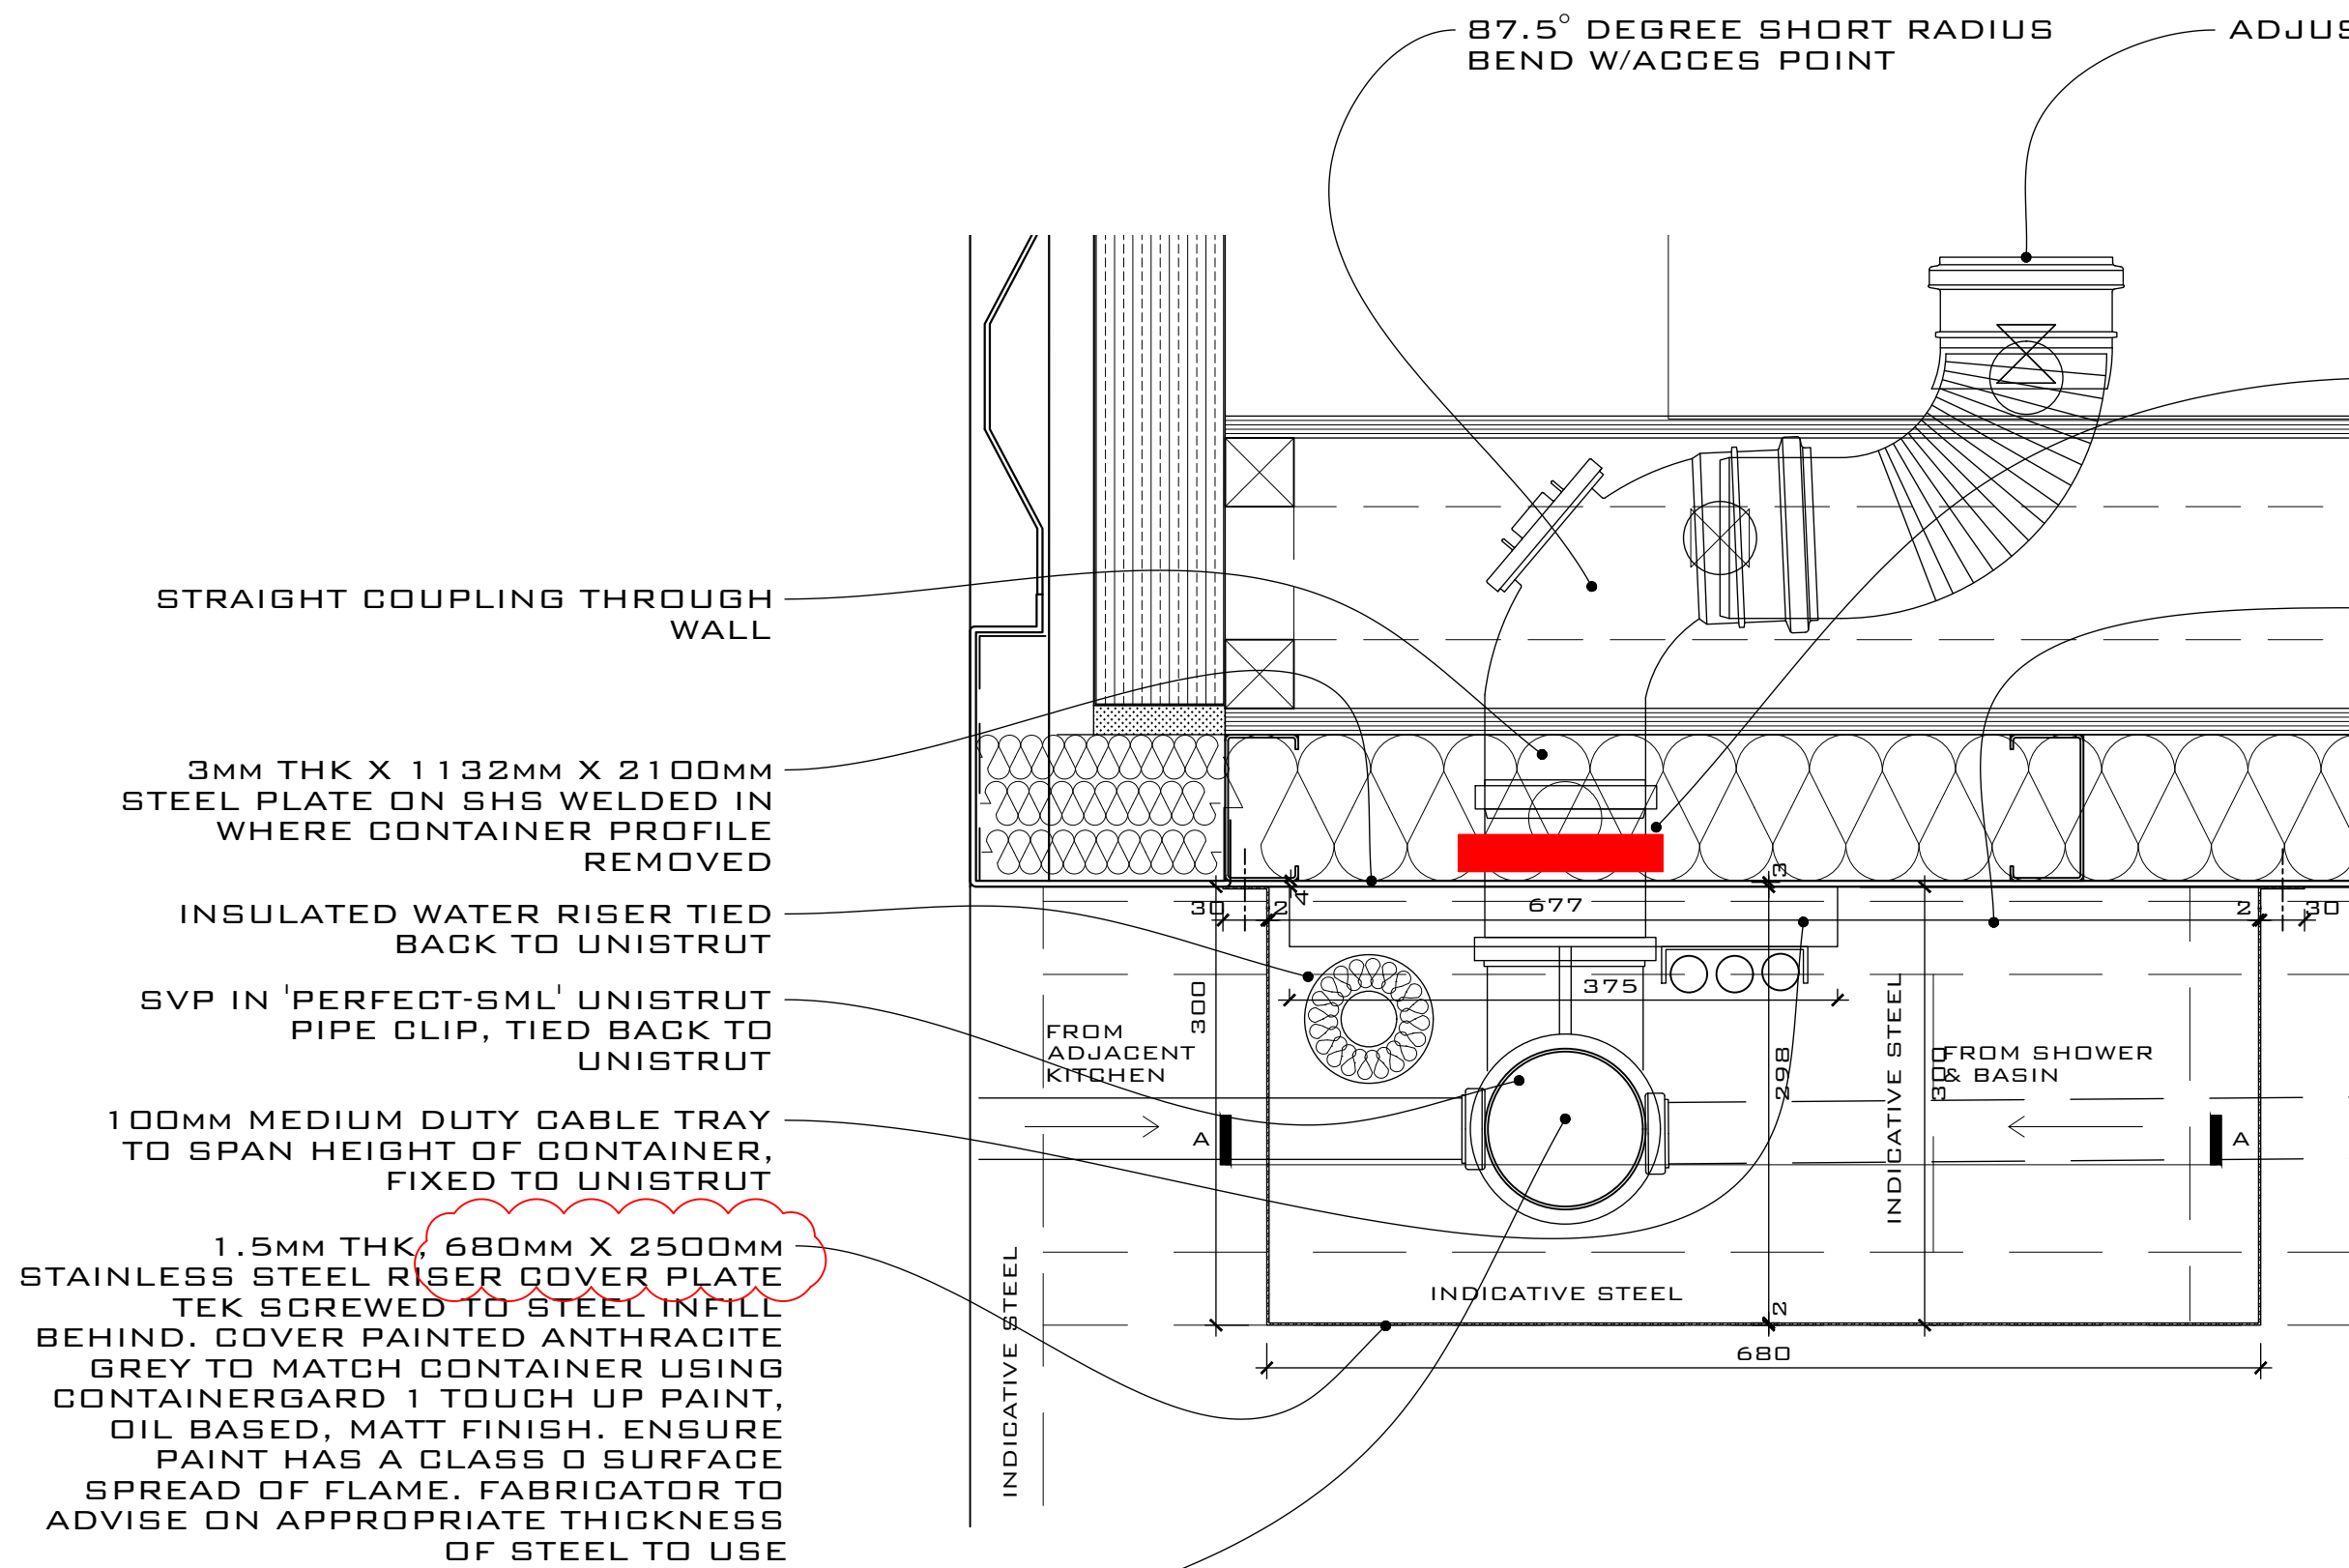

NOTES:

CDM 2015  
RESIDUAL RISK

THE CONTRACTORS SHALL  
FAMILIARISE THEMSELVES  
WITH THE PROJECT AND  
EMPLOY SYSTEMS AND  
METHODS OF WORKING TO  
REDUCE ANY HAZARDS

THE CONTRACTORS SHALL  
PLAN, MANAGE, MONITOR  
AND COORDINATE HEALTH  
AND SAFETY DURING THE  
CONSTRUCTION PHASE OF A  
PROJECT

IF IN DOUBT ASK AND  
NOTIFY THE DESIGN TEAM

## GENERAL

IT IS ASSUMED THAT A  
COMPETENT CONTRACTOR  
FAMILIAR WITH THE WORKS  
REQUIRED WILL BE  
APPOINTED AND THAT THEY  
WILL BE AWARE OF THE  
STANDARD HAZARDS.

- DRAWINGS SHOULD ONLY BE SCALED FOR PLANNING PURPOSES. DO NOT SCALE FROM THIS DRAWING FOR CONSTRUCTION PURPOSES.
- ALL DIMENSIONS ARE IN MM, UNLESS STATED OTHERWISE.
- ALL DIMENSIONS TO BE CHECKED ON SITE PRIOR TO CONSTRUCTION OR ORDERING.
- ANY ERRORS OR OMISSIONS TO BE NOTIFIED TO CITIZEN LLP IMMEDIATELY. CONTRACTOR TO BE RESPONSIBLE TO MANUFACTURE LITERATURE AND IMPLEMENT ITS REQUIREMENTS PRIOR TO INSTALLATION OF ANY MATERIALS AND COMPONENTS.
- CITIZEN LIMITED IS NOT RESPONSIBLE FOR ANY BUILDING WORK THAT IS CARRIED OUT ON SITE.
- THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL NECESSARY ARCHITECTURAL, STRUCTURAL AND SPECIALIST DRAWINGS, SPECIFICATIONS, SCHEDULES OF WORK AND DATA SHEETS.
- ALL MATERIALS AND WORKMANSHIP SHALL CONFORM WITH THE RELEVANT BRITISH AND EUROPEAN STANDARD, SPECIFICATIONS AND CODES OF PRACTICE.
- IF IN ANY DOUBT, ASK.
- WALKWAY DESIGN BY OTHERS. FINAL WALKWAY JUNCTIONS TBC.
- CONTAINER DIMENSIONS CAN VARY. ALL DIMENSIONS SHOULD BE CHECKED BEFORE SITE INSTALLATION.

D	28.11.17	RISER COVER SIZE INCREASED AS PER CLIENTS REQUEST	RS	JS	JS
C	26.10.17	RISER COVER SIZE INCREASED TO HOUSE ISOLATORS	RS	JS	JS
B	23.06.17	REVISED IN LINE WITH CLIENT & CONTRACTORS COMMENTS. DTM 15.06.17	RS	JS	JS
A	02.06.17	REVISED FOLLOWING DTM & ISSUED FOR CONSTRUCTION	RS	JS	JS
REV	DATE	REVISION	DRAWN	CHECKED	APPROVED

COPYRIGHT CITYZEN LIMITED

**CITYZEN**  
ARCHITECTURE | ENVIRONMENT

MARITIME HOUSE  
BASIN ROAD NORTH  
HOVE  
EAST SUSSEX  
BN41 1WD

CONTACT@CITYZENDESIGN.CO.UK  
WWW.CITYZENDESIGN.CO.UK  
01273 704 901

Chartered Institute of  
Architectural Technologists  
Registered Practice

CLIENT:  
**CARGOTEK**

DESIGNER:  
ROMAN SCHNECKER

PROJECT: **CARGOTEK 20FT PRODUCT**

TITLE:  
TYPICAL WALKWAY SERVICE RISER  
DETAIL

SCALE:	DATE:
1:10 @ A1	10.05.17

PURPOSE OF DRAWING: CONSTRUCTION

DRAWING: PROJECT REF - DRG NO. (REVISION)

1705-CR-561 (D)